

flexible and versatile

As a cost-effective all-round series for wet and dry sanding, 1948 siaflex produces outstanding results in all available grits and in a variety of automotive applications.

Advantages

- High stock removal with good finish
- Highly flexible and adaptable to contours
- Minimal clogging thanks to open coating in 220 - 600 grit range
- Long lifetime
- Suitable for general use in dry and wet sanding applications
- Versatile all-round product with an attractive range of options



Applications


- Sanding off of coatings and impurities
- Sanding out of unevenness at the edges of repaired surfaces
- Flattening of body filler and primer filler
- Fine sanding of primer filler
- Keying of old and new varnishes
- Removal of orange-peel effect and dust inclusions

Product profile

Grit type:	Blue-fired aluminium oxide/white aluminium oxide	
Backing:	Fibre-reinforced latex paper	
Coating:	Electrostatic	P040 – P180
	Electrostatic open	P220 – P600
	Electrostatic	P800 – P1500
bonding:	resin over resin	
Coating:	Stearate	P180 – P800

Properties


The following properties refer to the materials used in the main application:

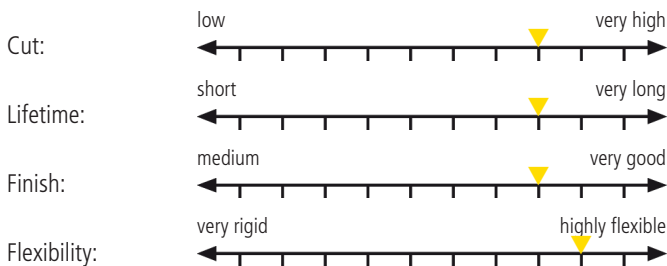

Materials

Colour; Primer filler; Body filler; Varnish; Old lacquer; Primer coat; Epoxy primer coat; Cathodic dip primer coat; Plastics; Acrylic glass (Plexiglass); Gelcoat polyester; Glass-fibre reinforced plastic (GRP); Composite; Aluminium; Steel

Application

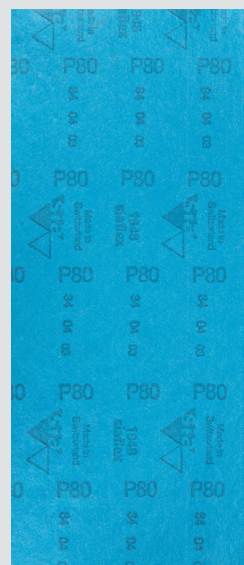

16				
20				
24				
30				
36				
40	■	■		
50				
60	■	■		
80	■	■		
100	■	■		
120	■	■		
150	■	■	■	
180	■	■	■	
220	■	■	■	
240	■	■	■	
280	■	■	■	
320	■	■	■	
360	■	■		
400	■	■	■	
500	■	■	■	
600	■	■	■	
800	■	■	■	■
1000	■	■	■	
1200	■	■	■	
1500	■	■	■	
2000				
2500				
3000				
4000				

plain
siafast
sia-soft
SKF

Area
Coatings and Composites

Product line
Coated abrasives

